



Automatic Printing Plate Bender APB



This system makes it possible to precisely bend an offset printing plate using the printing image as a reference and ensures an axially parallel position of the printing image on the sleeve or plate cylinder.

Polygraphische innovative
Technik Leipzig

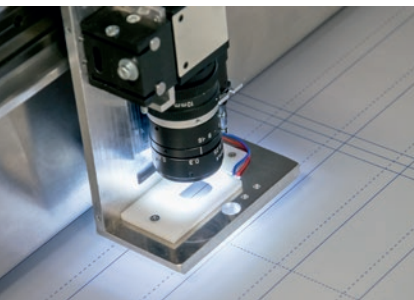



Automatic Printing Plate Bender APB

Working Principle

After placing the printing plate against the mechanical endstops in the bending unit, the current position of the printing image is determined with micrometer accuracy by means of two, practically invisible measuring elements on the edge of the printing plate. An automatic positioning system iteratively moves each printing plate into a fixed position followed by the automatic bending process. For offset printing presses, where the bended edges invariably determines the position of the plate on the cylinder, the makeready time is in this way considerably reduced.



PITSID develops systems for the graphic arts industry together with the Sächsisches Institut für die Druckindustrie.

The current product assortment comprises devices for measuring and testing print registration, contact pressure, traction force, packing height, gap widths, UV curing, IPA concentrations, book block strength and also printing plate positioning in plate bending devices and roller adjustments.

**PITSID Polygraphische innovative
Technik Leipzig GmbH**
D-04329 Leipzig
Mommсенstraße 2
Tel +49 341 25942-0
Fax +49 341 25942-99
info@pitsidleipzig.com
www.pitsidleipzig.com

Technical Data

Measurement principle

The position of the printing image is determined by means of two video pictures of the measuring elements imaged on the printing plate.

Measuring elements

- 2 elements on each plate
- Circle-form arrangement of multiple 80 µm dots within an overall diameter of 3 mm

Operation

- TFT monitor with touch screen control
- Motorised format length adjustment
- After insertion of the printing plate and the start of the bending process: Fully automatic position determination and position correction until reaching the preset tolerances as well as the pneumatic bending of the plate
- Emergency operation after power outage using the safety handwheel for format length adjustment, pneumatic switch (clamping) and pneumatic button (bending)

Processable printing plate formats

- Plate length min.: 394 mm
- Plate length max.: 777 mm
- Plate width: 520, 860, 1060 mm
- Other formats upon request!

Bending geometry

	Bending length	Bending angle	Bending radius
Front edge	7 mm	60°	0.2 mm
Tail edge	7 mm	120°	0.2 mm
Other bending geometries upon request!			

Positional correction of the printing plate

- Positioning range in x/y direction approx. ± 1.5 mm
- Angular adjustment $< \pm 0.5^\circ$
- Positioning accuracy: up to ± 2 µm

Mechanical data

Floor-mounted device, horizontal plate alignment

Device dimensions

Base area approx. 1350 mm (W) x 1500 mm (D) x 1600 mm (H)

Weight

Approx. 220 kg

Connection values

- Power supply voltage 100-240 VAC / 50/60 Hz
- Compressed air supply 6 - 10 bar oil-free compressed air
- Air consumption 100 NI/min