



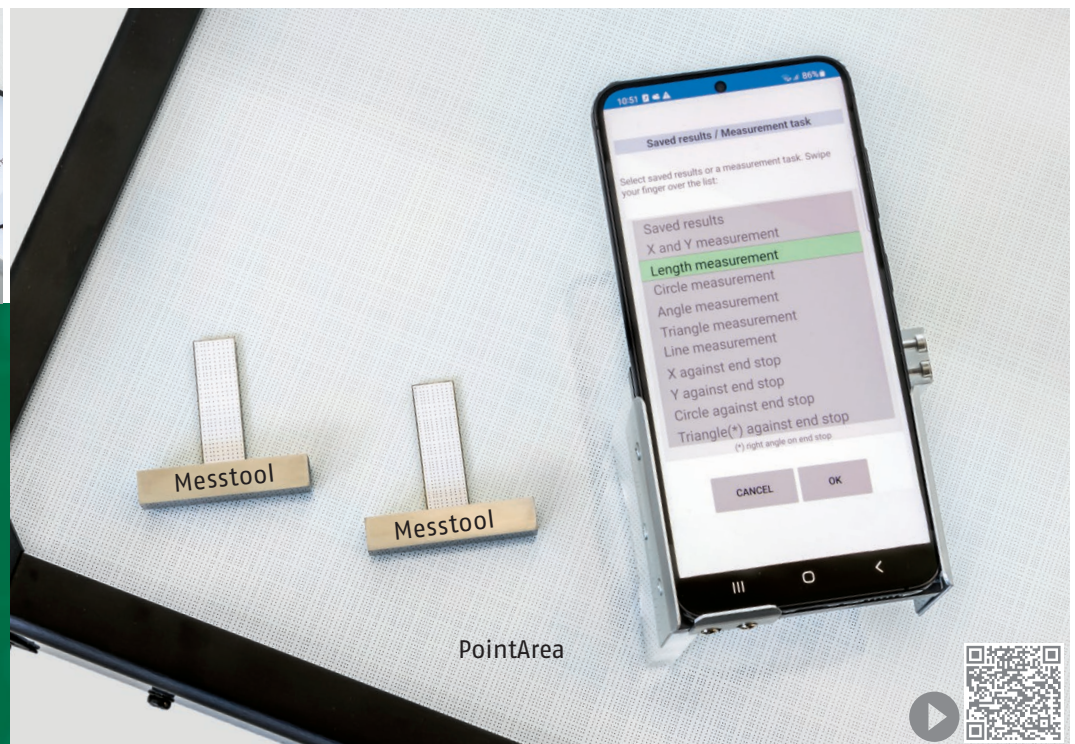

INCREASE
EFFICIENCY

2D Measuring System MICRO CONTROL

Mobile Measuring System for Determining
the Shape of Flat Objects

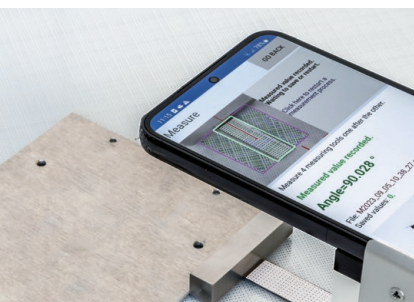


Precise Micrometer Resolution



**Determination of Lengths,
Angles, Diameters and Linearity**



Fast, User-Friendly Measurement
Intuitive operation via app

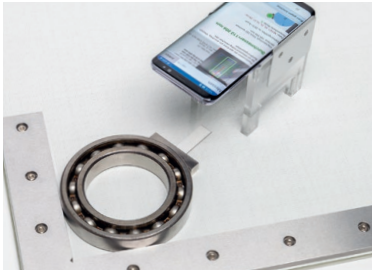

2D Measuring System

MICRO CONTROL

Working Principle

The measuring system is based on a reference surface that is designed as a coded coordinate system, the PointArea. Measurement tools are used for mechanically contacting the object to be measured. These measurement tools also feature a separate coordinate system. A smartphone captures an image of the measurement tool and the PointArea. Through internal calculations in the smartphone, the position of the measurement tool and consequently the edge of the measured object can be precisely identified. The operator is guided intuitively through a user-friendly smartphone app. Measurement results are immediately displayed and visually depicted.



Scan here for
product infos.



PITSID develops, produces and sells measuring systems, supported by the Sächsisches Institut für die Druckindustrie. The measuring systems are used for quality control and to increase efficiency during adjustment and maintenance operations.

**PITSID Polygraphische
innovative Technik
Leipzig GmbH**

Mommsenstrasse 2
04329 Leipzig | Germany
www.pitsidleipzig.com/en

**Innovative Measuring Systems
Made in Germany**



Innovative System for Precisely Measuring Two-dimensional Objects

The 2D Measuring System MICRO CONTROL is an innovative system for precisely measuring primarily (thin) flat objects. The dimensions and geometry of objects of various sizes can be determined with a resolution in the μm range with very simple user operation. Even extremely thin objects, such as paper or cardboard, can be measured with the system. The system is particularly effective at measuring linear dimensions, determining angles and measuring lengths. The coordinate system can have a maximum dimension of 8x8 m. The ambient temperature is taken into account and is compensated for. All measurement data is displayed and saved. The saved data can be exported to a PC for protocol generation.

End-user Industries

Printing and packaging industry, metal and plastic manufacturing, optics industry, fabrication industry

Technical Data

Dimension determination

Parallelism, straightness, angle, diameter, length, width

Measurement area

Up to 1 m x 1 m

Response time/Measurement duration

< 1 s

Measurement uncertainty

$\pm 15 \mu\text{m}$ for linear measurements
 $\pm 0.1^\circ$ for angle measurements
 $\pm 50 \mu\text{m}$ for length measurements

Operating temperature

15° C ... 30° C

Measuring device weight

< 800 g

Scope of delivery

Mobile measuring device (smartphone), incl. holder, coordinate system in customer-specific dimensions (PointArea), measurement tools